

# Datasheet

## DK360



### Instruction

The Dnake wireless doorbell system offers a hassle-free, cable-free installation that utilizes advanced Wi-Fi HaLow technology, providing long-range, robust connectivity even through walls and obstacles. This product ensures rapid configuration, making it ideal for users seeking reliable access control with features like remote unlocking for added convenience in modern home security.

### Key Features


- Plug & Play
- Long-range transmission (500m in open area)
- 7-inch IPS capacitive touch screen
- One-click direct call
- Support Mobile App
- Eco-Friendly Solar Charging



## DNAKE DM60

### Key Features

- Easy configuration
- 7-inch IPS capacitive touch screen
- Support Wi-Fi (2.4G/5G)
- TF Card Slot
- Surface mount/Desktop

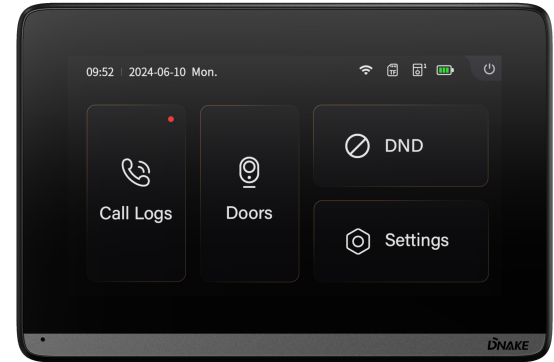

### Physical

- Material: Plastic
- System: Linux
- RAM:128MB
- ROM:128MB
- Power Supply: DC 12V
- Battery: Rechargeable Lithium Battery (DC3.7V/2500mAh,Optional)
- Wi-Fi: 2.4GHz&5GHz(Optional)
- Support TF card
- Antenna:Built-in Antenna
- Installation: Surface mount/Desktop
- Dimension: 191×127×20mm
- Working Temperature: -10°C to +55 (Work with Battery : -10°C to +45°C)
- Storage Temperature: -40°C to +70°C
- Working Humidity: 10% to 90% (non-condensing)

### Display

- Display: 7-inch IPS LCD
- Screen: Capacitive touch screen
- Resolution: 1024x600

### Audio

- Audio Codec: G.711
- Echo Cancellation
- Microphone: Built-in microphone
- Speaker: Built-in speaker

### Video

- Video Codec:H.265



## DNAKE DC300

### Key Features

- Wi-Fi Halow
- 110° wide-angle 2MP HD camera
- Single call button with name plate
- Tamper Alarm
- Eco-Friendly Solar Charging(Optional)



### Physical

- Material: Plastic
- System: Linux
- RAM: 64 MB
- ROM: 16MB
- Battery: Rechargeable Lithium Battery (DC3.7V/4200mAh)
- Power Supply: DC 9-24V
- Antenna: Built-in/External
- Relay Output: 1 Relay
- Input: 1 for Exit Button
- Tamper alarm: Support
- Installation: Surface Mounting
- Dimension: 174×60×33mm
- IP Rating: IP65
- Working Temperature: -10°C to +55°C
- Storage Temperature: -40°C to +70°C
- Working Humidity: 10% to 90% (non-condensing)

### Audio

- Audio Codec: G.711
- Echo Cancellation
- Microphone: Built-in microphone
- Speaker: Built-in speaker

### Video

- Video Codec: H.265
- Video Resolution: 1920 x 1080
- Viewing angle: 110°(H)
- Max. Image Transfer Rate: 1080p – 15fps
- Light Compensation: LED white light

